

Rancher Grille Guard
 Installation Instructions
45639 & 46639
 Ford F-150 '09

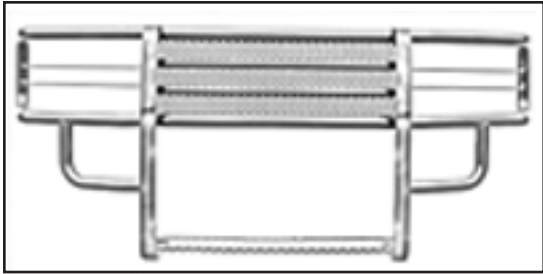


Diagram 1

Parts List:	
1 - Rancher Guard Ring	8 - 1/2" Hex Nuts
1 - Driver Bracket #46639-7	8 - 1/2" Lock Washers
1 - Passenger Bracket #46639-8	10 - 1/2" x 2" HH Bolts
2 - Clamp Bracket #46639-9	18 - 1/2" Flat Washers

1. Remove the contents from the box and check for missing pieces or damage. If parts are missing or damaged, contact the original place of purchase. Read the instructions completely before beginning. Two people are strongly recommended for this install.
2. If vehicle comes equipped with factory tow hooks. The factory tow hooks will have to be removed. The tow hooks will not be reused. The brackets are equipped with holes to be used as the tow hooks.
3. If the vehicle does not come equipped with tow hooks the air dam will have to be cut. Using **Diagram 2** and **Diagram 3**, measure 4 1/2" from the outside crease towards the middle of the vehicle and mark the down spoiler at that point. From there, measure 3 1/2" towards the middle of the vehicle once again and mark the spoiler at the point. Cut out the 3 1/2" box in the down spoiler as shown in **Diagram 3**. Repeat the above procedure for the passenger side of the vehicle.

View of Bumper on Vehicle

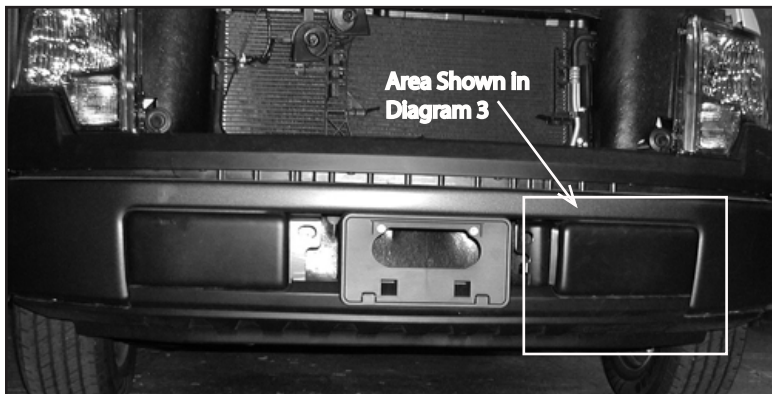


Diagram 2

Driver Side of Vehicle

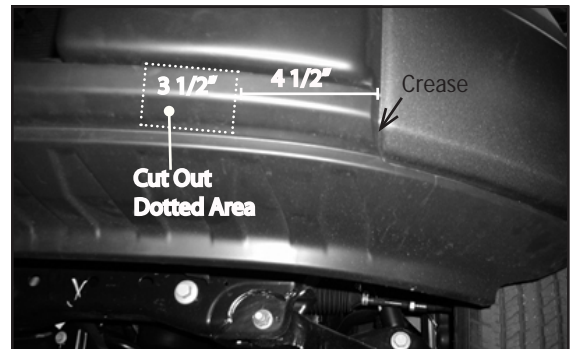


Diagram 3

